

## TPR-110CR Presenter Transmitter Quick Start Guide



Thank you for purchasing the Luxi Electronics® TPR-110CR Presenter® transmitter. Please read through this manual before using the product.

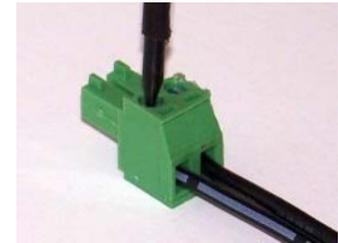
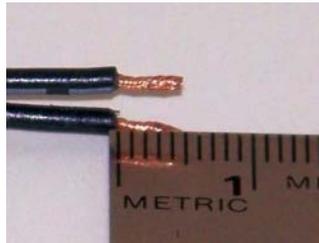
**How the product functions:** Think of the daisy chain as the flow of a river; each transmitter (Tx) connects to a source device and loads the signal to the river flow; each receiver (Rx) unloads the signal from the river flow and sends it to the display it is connected to. The front panel and the RS-232 controls determine which source signal goes to which display.

### System diagram:



**Power options:** This product can draw power from other Presenter products in the chain or from an optional external power supply.

**Captive screw plug termination:** The captive screw plugs for power, RS-232 and contact controls are supplied with the unit. Separate the wires about 1" (2.5 cm) long; strip off the wire insulation precisely 3/16" (5 mm) from the end. Identify the positive and negative leads for power; Luxi power supply has a white stripe on the positive wire. If not sure, use a multi meter to verify.



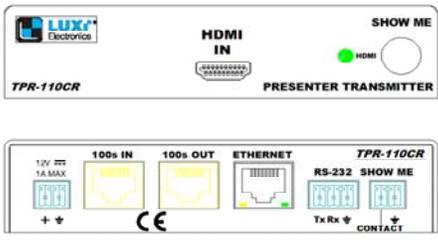

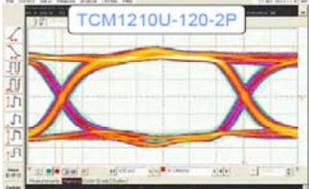
**RJ45 plug termination:** Follow the standard EIA 568B pin out.

**Control options:** Pressing the "Show Me" button on the front panel will select the source connected to this Tx unit; all displays will show the same content from this Tx box. An external button can be connected to the "Show Me" port on the rear panel. A RS-232 host connected to the rear panel can control all functions of every unit in the chain. Make sure both DIP switches recessed on the bottom side are in the down (off) position.

**Ethernet port:** For providing a system wide internet access. Be very careful NOT to plug the Ethernet cable into the yellow 100s connector or vice versa! Permanent damage may occur.

**Front panel LED:** Green = this Tx selected; Amber = this Tx not selected; Red = communication error

**Support:** Please contact your reseller directly for local support; or Luxi using the contact info above. See Luxi website for RS-232 commands and user manuals.

<b>Product Specifications</b>	<b>Part Number: 74-017-01</b>
Presenter 110 series transmitter	Model: TPR-110CR
<b>Product Image</b>	<b>Product Drawing</b>
<p>Front</p>  <p>Back</p> 	
<b>Features and Benefits</b>	<b>Mechanical</b>
<ul style="list-style-type: none"> <li>&gt; Patent pending, revolutionary products to replace the centralized switching and distribution</li> <li>&gt; Completely scalable; you can add more Tx or Rx boxes on the fly for expansion</li> <li>&gt; Only 1 Cat6 or Cat5 cable needed to connect the adjacent Presenter Tx or Rx; no more heavy clusters of cables; very easy cable pull and termination</li> <li>&gt; No compression; full 18 Gbps bandwidth; virtually no propagation delays</li> <li>&gt; "Show Me" control button on every Tx box gives every user a simplified way to control the signal routing</li> <li>&gt; Additional control devices can be inserted anywhere in the daisy chain via RS-232</li> <li>&gt; Signals can be transmitted to very long distances with multiple daisy-chained devices up to 110' (33 m) each span (e.g., 10 spans for up to 330 m)</li> <li>&gt; Remote power capability</li> <li>&gt; Rack mountable, under-table mountable, above-projector mountable metal enclosures</li> </ul>	<p>Enclosure material: steel          Enclosure size: 4.29" x 1.00" x 3.00" (10.9 x 2.5 x 7.6 cm)</p>
<b>Package</b>	<b>Electrical</b>
<p>One piece in one color cardboard box; with captive screw plugs and quick start guide          no power supply</p>  <p>Box size: 6.0" x 4.8" x 1.1" (15.3 x 12.2 x 2.8 cm)          Weight: package, 0.62 lb (0.28kg); product, 0.48 lb (0.22kg)          36-pc box size: 15" x 13" x 8" (38 x 33 x 20 cm)          36-pc box weight: 24.5 lb (11 kg)</p>	<p>HDMI signal input          Maximum data rate: 9 Gbps (3 Gbps per color)          Maximum pixel clock: 300 MHz          Resolution range: Up to 1080p 48-bit @ 60 Hz, or 3D, or 4k @ 30 Hz</p> <p>Daisy chain system          Luxi proprietary format, digital video, audio, control, Ethernet and power, up to 32 devices (1 Tx = 1; 1 Rx = 2)          System cables: unshielded Cat6 550 MHz rated 23 AWG solid conductor cables recommended; Cat5, 5e, 6, 7 unshielded and shielded cables also usable          Max distance between 2 adjacent devices: Typical 33 m (110') for WXGA/720p; 18 m (60') for 1080p (depends on source, display device performance, and signal format)          RJ45 connector pin configuration: standard EIA 568B pinout</p> 
<b>Connections</b>	Electrical test results (1080p 24-bit 60 Hz results below)
<p>Input connectors: 1 HDMI, 1 daisy chain in, 1 Ethernet          Output connector: 1 daisy chain out          Power connector: 2-pin 3.5 mm captive screw receptacle          Control connectors: 1 RS-232, 1 Show Me</p>	
<b>Other Related Products</b>	Power: 12 V DC, 0.2 A from external power or other Presenter
<p>Power supply, 100-240 V in on US plug, 12 V out, P/N 69-002-01</p>  <p>Under desk mount, P/N 78-002-01</p>  <p>Presenter receiver, P/N 74-020-01, model RPR-110CR</p> 	<p>Optional power supply:          Auto switching 100-240 V AC input on US plug, 12 V DC 1 A max on bare wires, wall ward type, UL, PSE, CE, FCC</p> <p>Mounting: Not included. Luxi under desk mount 78-002-01, compatible with Extron thru desk mount 70-077-02, rack shelf 60-604-21, 60-604-11, 60-604-02, above projector mount 70-217-01, 70-739-02, 70-734-01, 70-563-03 or equivalent Middle Atlantic models</p> <p>Regulatory compliance          Safety: CE, cUL, UL (power supply only)          EMI/EMC: CE, FCC Class A</p> <p>MTBF: 30,000 hours          Warranty: 3 years parts and labor</p>