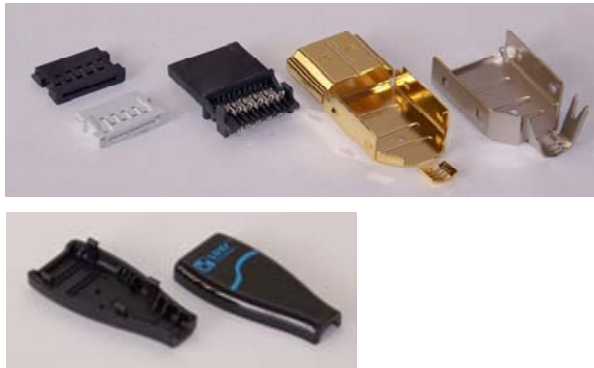
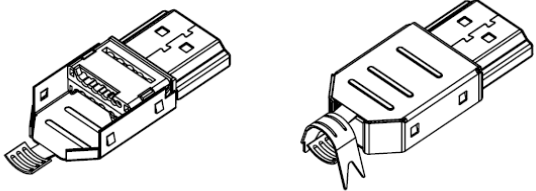


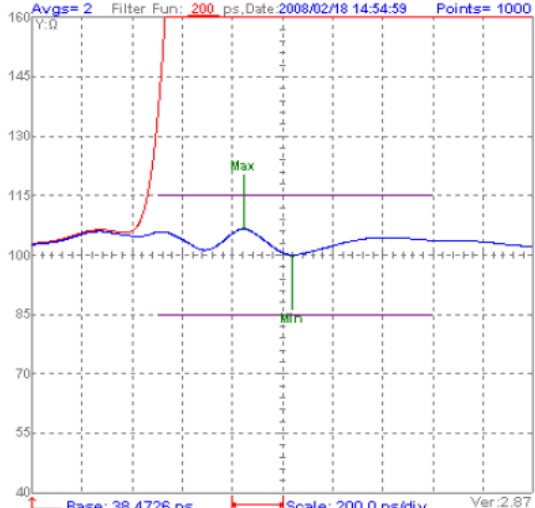



Product Specification	Part Number: 68-009-11								
HDMI 28 AWG DIY connector/clamshell for regular wires	Model: DIY-28DS10								
Product Image	Product Drawing								
									
Features and Benefits	General								
<ul style="list-style-type: none"> > Luxi Electronics patented HDMI DIY design > Luxi Electronics patented HDMI locking plug design > Terminate HDMI in the field for less than 10 minutes > No solder, no wire stripping, just one crimp > Better electrical performance than factory made cable! > Pull HDMI raw cable thru wall then terminate > HDMI plug repair in the field > Cut to length in rack termination for neat wire dressing > HDMI 2.0 4k 60 Hz, 3D, HEAC compliance > Gold plated full metal shell for better strength and shielding > Each component interlocks to each other for high reliability > Increased wall thickness for high strength and no cracking > RoHS compliant 	<p>Connector type: HDMI Type A Gender: male Number of pins: 19 HDMI spec compliance: rev 2.0 Compatible raw cable: 28 AWG (0.25 to 0.32 mm conductor OD), regular HDMI wires</p>								
Package	Mechanical								
10 sets of components (for making 10 connectors) in one PET tray; and 10 sets of clamshells in another tray	<p>Overall plug width (with clamshell): 0.81" (20 mm) Overall plug height (with clamshell): 0.45" (11 mm) Overall plug length (with clamshell): 2.0" (51 mm) Retaining force (pulling from female): 10 lbs (4.5 kg) typical Contact pin gold plating: 30 u" (0.76 um) Top metal shell gold plating: 2 u" (0.05 um) Contact pin pitch: 0.039" (1.00 mm)</p>								
 <p>10-pc tray: 12.6" (32 cm) x 4.1" (10 cm) x 0.55" (1.4 cm) 10-pc tray weight: 0.5 lb (230 g) 300-pc box: 13.8" (35 cm) x 13.8" (35 cm) x 12.8" (32 cm) 300-pc box weight: 16.0 lb (7.3 kg)</p>	Electrical								
Other Related Products	<p>Supported formats: 4k, 3D, deep color, 1080p, etc. Max data rate: depends on cable length; 24 Gbps at 2 m Max cable length: 12 m (40') at 1080p typical (28 AWG) up to 24 m (80') with HDMI extender</p>								
Hand tool, P/N 68-011-01, model DIY-28T	<p>Max current: 0.5 A Max voltage: 40 V Shielded: Yes Impedance: 100 ohms +6/-0 at the termination point</p>								
	 <p>Parameter Name: HDMI Cat2 Transition Area Impedance CLK</p> <table border="1"> <tr> <td>Spo Max: 115 Ω; Ext: 125 Ω</td> <td>Spo Min: 85 Ω; Ext: 75 Ω</td> </tr> <tr> <td>Max: 106.56 Ohms at 39.3166 ns</td> <td>Min: 100.00 Ohms at 39.5106 ns</td> </tr> <tr> <td>ΔΩ: 6.56</td> <td>Avg: 103.28 Ohms</td> </tr> <tr> <td>Duration Max: 250 ps</td> <td>Result: Pass</td> </tr> </table>	Spo Max: 115 Ω; Ext: 125 Ω	Spo Min: 85 Ω; Ext: 75 Ω	Max: 106.56 Ohms at 39.3166 ns	Min: 100.00 Ohms at 39.5106 ns	ΔΩ: 6.56	Avg: 103.28 Ohms	Duration Max: 250 ps	Result: Pass
Spo Max: 115 Ω; Ext: 125 Ω	Spo Min: 85 Ω; Ext: 75 Ω								
Max: 106.56 Ohms at 39.3166 ns	Min: 100.00 Ohms at 39.5106 ns								
ΔΩ: 6.56	Avg: 103.28 Ohms								
Duration Max: 250 ps	Result: Pass								
HDMI raw cable spool in a box, available in 2 lengths 250' (76 m) spool, P/N 22-001-02, model HD-28RD250 500' (152 m) spool, P/N 22-001-03, model HD-28RD500									
 <p>HDMI Extender P/N 74-035-01 model EHD-111</p>									